

# Micro-Meter Mix System

TS8200D 400 Series Data Sheet



TECHCON™



## True volumetric measuring, mixing, and dispensing of 2-component materials

The TS8200D Series Micro-Meter Mix is a precision volumetric mixing and dispensing system for 2-component material. It consists of 2 progressive cavity pumps integrated in a fluid manifold connected to the static mixing nozzle. Part A and part B of the material is precisely fed by the progressive cavity pump with the correct ratio into the static mixing nozzle to provide accurate mixing and dispensing output.

Every component of the pump was designed to the highest tolerances and manufactured to the strictest degree of precision, ensuring world class accuracy and repeatability.

TS580D-MM smart controller features an intuitive touchscreen user-interface for easy setup and operation. Pump calibration is quick and easy. Dispensing parameters can be quickly dialed in on the touchscreen.

### KEY FEATURES AND BENEFITS:

- True Volumetric/Positive Displacement technology to achieve +/- 1% variation in dispense output
- High quality mixing to ensure proper material curing
- Continuous Flow with adjustable flow rate to provide continuous dispensing process for efficient operation
- Independent of pressure and viscosity change to ensure accurate and precise results
- Suck back action to prevent material dripping
- Quick and easy cleaning to reduce down-time
- Internal fluid pressure alarm to prevent cross-contamination

### TYPICAL APPLICATIONS:

- Bonding
- Glob-Top Potting and Encapsulation
- Potting of Electronic Components
- Battery Pack Sealing
- Thermal Paste Dispensing
- Filling


# Micro-Meter Mix System

TS8200D 400 Series Data Sheet



TECHCON

## TYPICAL SETUP

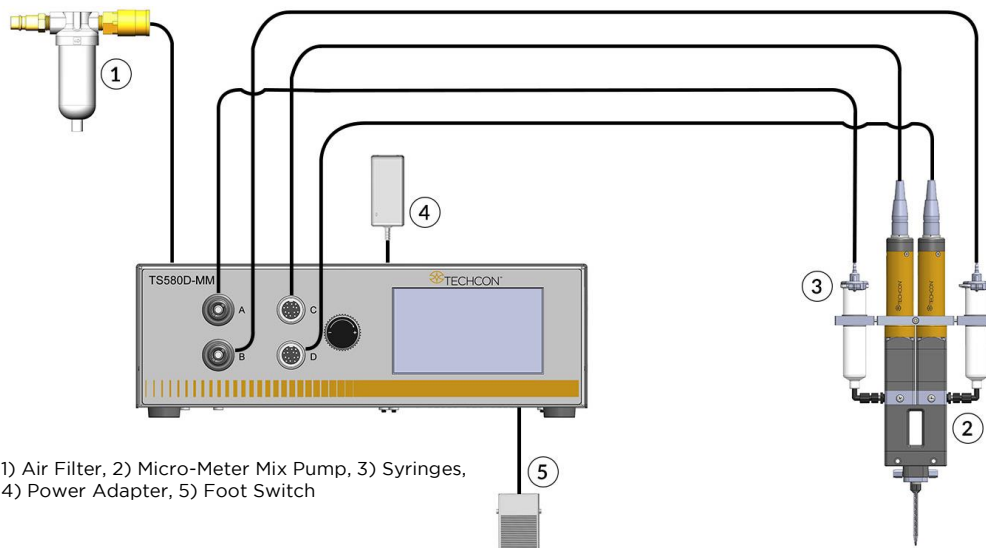

## SPECIFICATIONS

SPECIFICATIONS	
Part Number	TS8200D-400
Description	Pump 400 X 400
Size	314 mm L x 69 mm W x 33 mm D (12.4" L x 2.7" W x 1.3" D)
Weight	1.24 kg/2.74 lb.
Motor	24V DC, incremental encoder
Flow Rate	1.43–15.02 ml/min
Dispensing Volume Per Revolution	0.12 ml per pump
Minimum Dispense Volume	0.012 ml per pump
Repeatability	+/- 1% per pump
Dispense Accuracy	> 99%
Fluid Inlet Pressure Maximum	Up to 2 bar (30 psi) for viscosity of 1,000 cps or less, up to 5.5 bar (80 psi) for viscosity greater than 1,000 cps
Fluid Inlet Type	1/8" NPT
Fluid Outlet	Static Mixer Adapter
Mixing Nozzle	K-type, Standard Bayonet
Mounting	M4 x 35MM, SHC, S.S
Operating Temperature	10 – 40 °C (50 – 104 °F)
Fluid Viscosities	1 - 300K Cps (m.Pa.s)
Approval	CE, TUV-GS
Warranty	1 year, limited

Wetted Parts		
	Stator Housing: Anodized Aluminium	Manifold Gaskets: Viton
	Rotor: 17-4 Stainless Steel	Pump O-rings: BUNA N
	Stator: PFE	Vent seals: Fluorsilicone
	Flex Coupling: Stainless Steel, Polyolefin	Vent Screws: Stainless Steel
	Shaft Seal Block: UHMW PE	Fluid inlet fittings: UHMWPE, NYLON
	Manifold Plugs: Delrin	

**For Sales  
and Support:**

Techcon Corporate Headquarters  
10800 Valley View Street  
Cypress, CA 90630 USA  
Tel: 1-714-230-2398  
E-mail: eorders@okinternational.com

Visit our website for more information and to contact the Techcon office nearest you.

[www.techcon.com/contact](http://www.techcon.com/contact)