

FEATURES

- Average Forward Current: $I_{F(AV)}=2A$
- Polarity: Color band denotes cathode



SMA

Package Marking and Ordering Information

Product ID	Pack	Marking	Qty(PCS)
SS22~SS220	SMA	SS2★	5000

★:From2-20

MAXIMUM RATINGS ($T_a=25^{\circ}C$ unless otherwise noted)

Item	Symbol	Unit	Test Conditions	SS2								
				2	3	4	5	6	8	10	15	20
Repetitive Peak Reverse Voltage	V _{RRM}	V		20	30	40	50	60	80	100	150	200
Maximum RMS Voltage	V _{RMS}	V		14	21	28	35	42	56	70	105	140
Average Forward Current	I _{F(AV)}	A	60Hz Half-sine wave , Resistance load , FIG.1	2.0								
Surge(Non-repetitive)Forward Current	I _{FSM}	A	60Hz Half-sine wave , 1 cycle , Ta=25 ℃	50								
Junction Temperature	T _J	℃		-55~+125			-55~+150					
Storage Temperature	T _{STG}	℃		-55 ~ +150								

ELECTRICAL CHARACTERISTICS ($T_a=25^{\circ}C$ unless otherwise specified)

Item	Symbol	Unit	Test Condition		SS2							
					2	3	4	5	6	8	10	15
Peak Forward Voltage	V _F	V	I _F =2.0A		0.55		0.70		0.85		0.95	
Peak Reverse Current	I _{RRM1}	mA	V _{RM} =V _{RRM}	T _a =25℃	0.5				0.1			
	T _a =100℃			10		5.0						
Thermal Resistance(Typical)	R _{θJ-A}	℃/ W	Between junction and ambient		75							
	R _{θJ-L}		Between junction and terminal		17							

Notes:

Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.2" x 0.2" (5.0 mm x 5.0 mm) copper pad areas

Typical Characteristics

FIG.1: FORWARD CURRENT DERATING CURVE

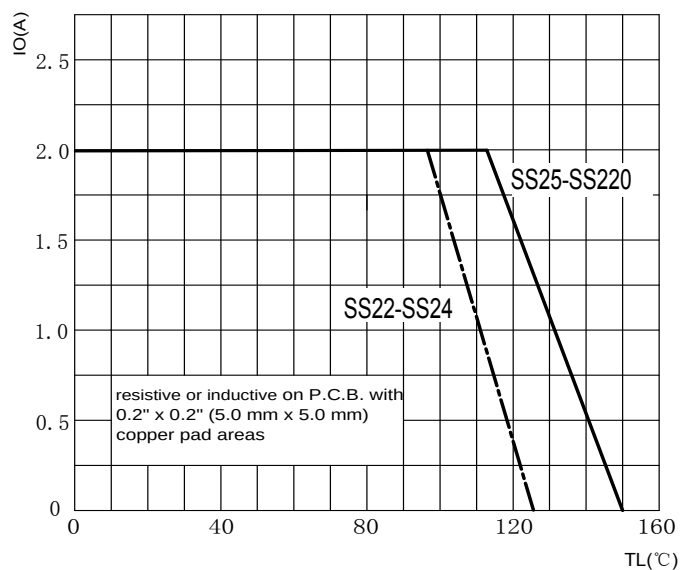


FIG.2: MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

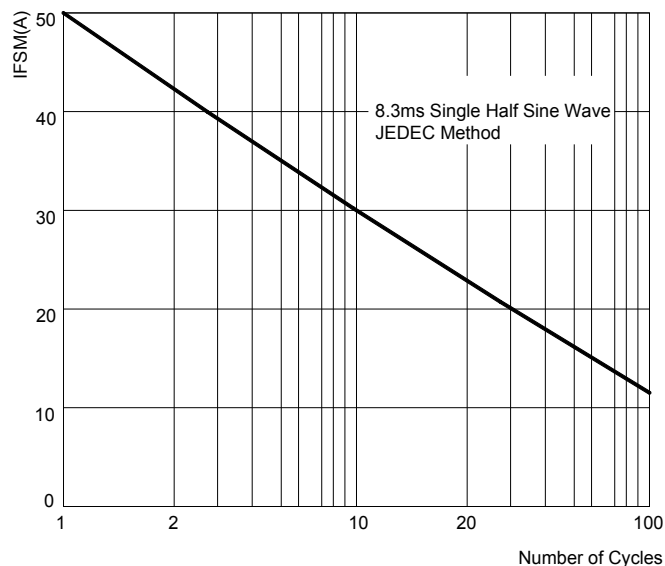


FIG.3: TYPICAL FORWARD CHARACTERISTICS



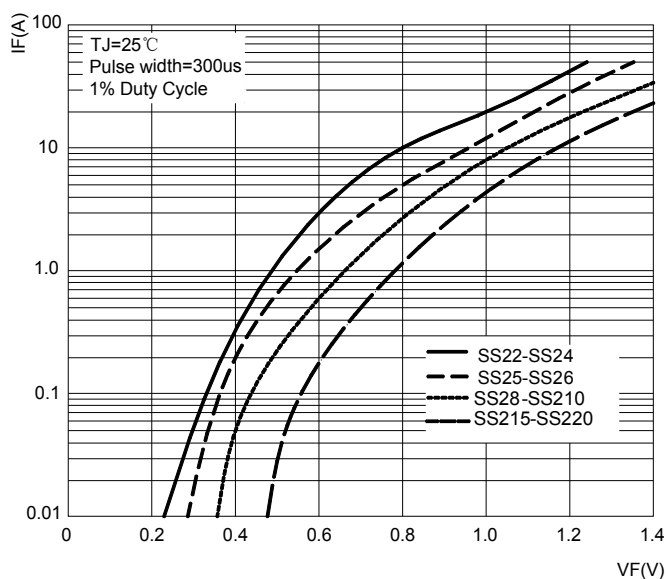


FIG.4: TYPICAL REVERSE CHARACTERISTICS

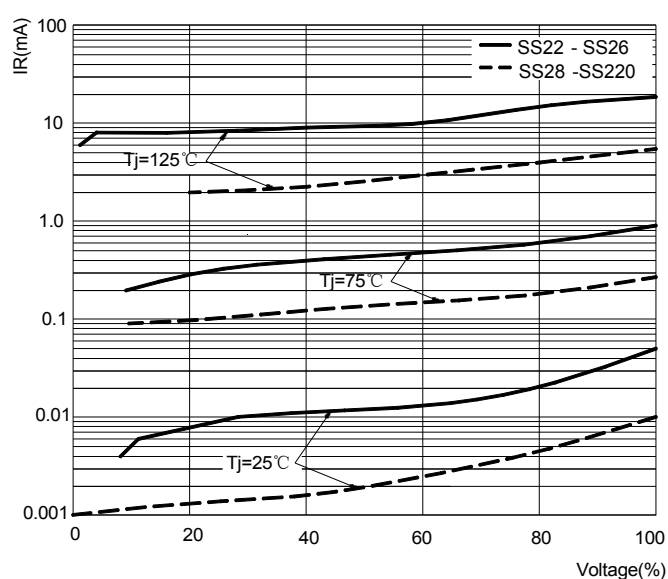

SMA Package Outline Dimensions

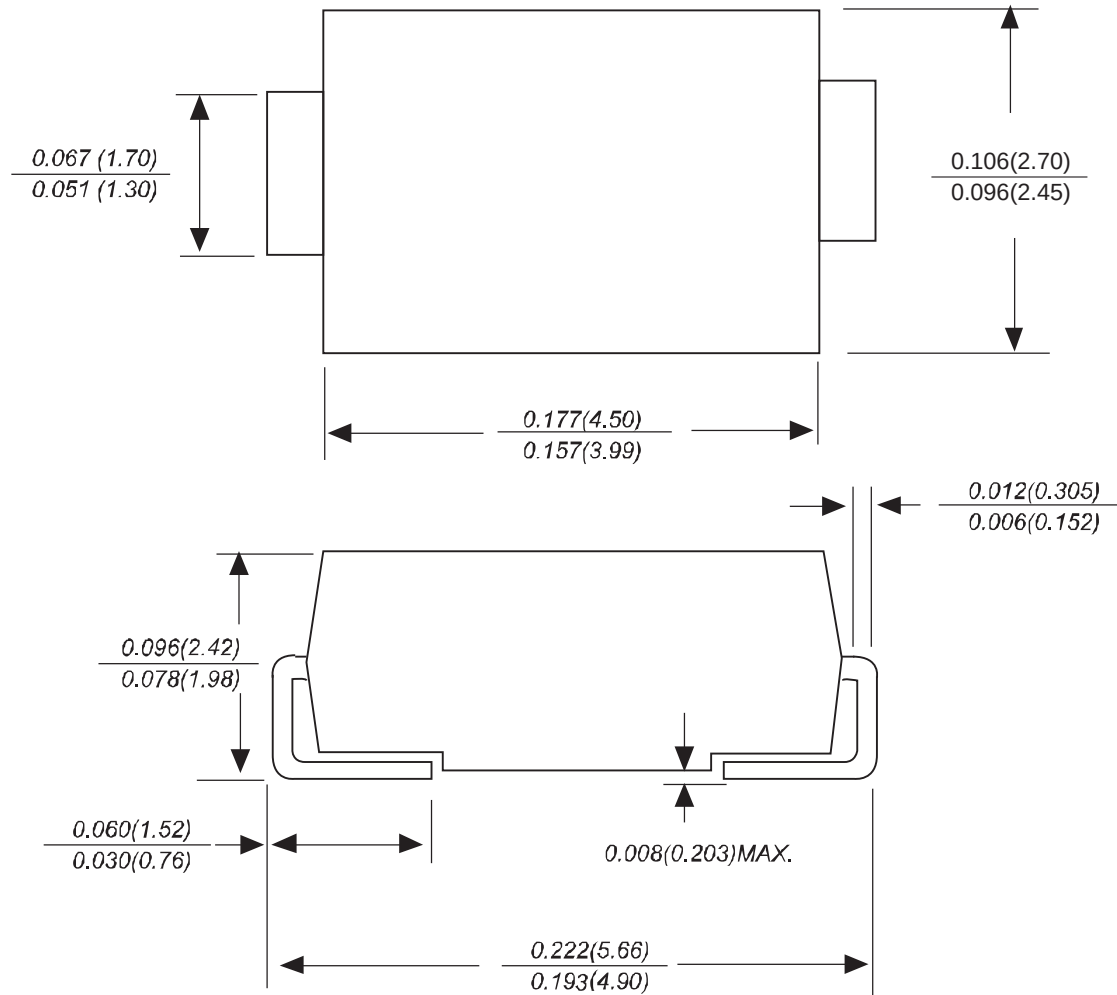

Dimensions in inches and (millimeters)