



veKON 浙江威利坚科技股份有限公司
ZHEJIANG VEKON TECHNOLOGY CO., LTD.

塑料制品

PLASTIC PRODUCTS

 (+86) 17300995175

 www.vekon.global

 info@vekon.global

 No. 99, Binhainan Third Road, Yueqing Economic Development Zone, Zhejiang Province, China

veKON

WE *are* VEKON GLOBAL

About us

VEKON Global company is a leading provider of high-technology products and complex solutions in the fields of electrical engineering, automation, and engineering infrastructure.

We promote the VEKON brand and its values worldwide, ensuring easy access for our Customers to VEKON innovations through a wide product range, balanced commercial policies, and exceptional Customer service.

Our core manufacturing facility, Zhejiang VEKON Technology Co., Ltd., located in Yueqing Bay Power Technology Town, Zhejiang Province, China, is a technological leader in modular electrical equipment. Established in 2002, it produces a diverse range of products including RCCB/RCBOs, MCBs, AFDDs, relays, contactors, and signaling and control devices. Manufactured on automated production lines, the facility boasts a daily output of 500,000 units. Our products are exported globally to Europe, the Americas, Southeast Asia, and Africa. Advanced technology, reliable equipment, guaranteed quality, and dedicated technical support have secured a substantial base of loyal customers worldwide. VEKON holds patents on its own designs and its products are CE, SEMKO, KEMA, and other internationally recognized certifications

compliant. Our manufacturing facilities maintain ISO 9001 certification.

In addition to Zhejiang VEKON Technology Co., Ltd., the VEKON brand encompasses over 30 other manufacturing sites across Mainland China. We design, manufacture, and supply a comprehensive range of low – and medium-voltage electrical products (up to 35 kV), as well as a wide array of industrial automation and process control equipment.

VEKON's strategy is built on Partnerships. By collaborating with professional distributors, retailers, panel builders, installers, system integrators, and service centers, we strive to provide seamless customer proximity. At VEKON, responsibility and reputation are paramount. Our greatest reward is the establishment of long-term, mutually beneficial business and personal relationships with our Partners.

Customers and Partners who choose VEKON products can rely on our commitment to VEKON values throughout the entire product lifecycle – from ideation and innovation to manufacturing, reliable supply, comprehensive solution implementation, and comprehensive warranty and post-warranty services.

Contents

目录

01

扎带
Ties

•

15

热收缩套管
Heat shrinkable tubings

•

18

定位片
Cable tie mount

13

尼龙电缆固定头
Nylon Cable Glands

•

16

LNE-WS 塑料波纹管
Plastic corrugated pipe

•

19

圆型号码管、膨胀管
Cable markers, Expand nails

14

MGM 系列金属电缆固定头、
卷式结束保护带 (缠绕管)
MGM Series Metal Cable Glands,
Spiral wrapping bands

•

17

圆型、方型固定夹系列
Circle cable clip and square cable clip

•

20


螺旋式压线帽
Screw on wire connector

自锁式尼龙扎带 Self-locking Nylon Cable Ties

材质: 采用UL认可之尼龙66料制成, 防火等级94V-2, 耐酸、耐蚀、绝缘性良好, 不易老化、承受力强。
颜色: 标准色为白色(白色), 另备有黑色, 特殊颜色欢迎订做。

Material: Nylon 66, 94V-2 certificated by UL, heat-resisting, erosion control, insulate well and not apt to age.
Color: Natural (or white, standard color), black and other colors are available as requested.

型号 Type	长 L		宽 W(mm)	最大束径 E(mm)Max. bundle dia.	拉力 Min tensile strength		包装 Packing	
	Inch	mm			lbs	kgs		
CT-2.5-60-100	2.4"	60	2.5	11	18	8	100PCS & 1000PCS	
CT-2.5-80-100	3.2"	80	2.5	16	18	8		
CT-2.5-100-100	4.0"	100	2.5	22	18	8		
CT-2.5-120-100	4.7"	120	2.5	30	18	8		
CT-2.5-150-100	6.0"	150	2.5	35	18	8		
CT-2.5-200-100	8.0"	200	2.5	50	18	8	100PCS & 1000PCS	
CT-3.6-100-100	4"	100	3.6	22	40	18		
CT-3.6-120-100	4.7"	120	3.6	30	40	18		
CT-3.6-150-100	6.0"	150	3.6	35	40	18		
CT-3.6-180-100	7.1"	180	3.6	42	40	18		
CT-3.6-200-100	8.0"	200	3.6	50	40	18		
CT-3.6-250-100	10"	250	3.6	65	40	18		
CT-3.6-300-100	12"	300	3.6	80	40	18		
CT-3.5-370-100	14.6"	370	3.5	102	40	18		
CT-4.8-120-100	4.7"	120	4.8	30	50	22		100PCS
CT-4.8-150-100	6"	150	4.8	35	50	22		
CT-4.8-180-100	7.1"	180	4.8	42	50	22		
CT-4.8-200-100	8.0"	200	4.8	50	50	22		
CT-4.8-250-100	10"	250	4.8	65	50	22		
CT-4.8-300-100	12"	300	4.8	82	50	22		
CT-4.8-350-100	14"	350	4.8	90	50	22		
CT-4.8-380-100	15"	380	4.8	102	50	22		
CT-4.8-400-100	16"	400	4.8	105	50	22		
CT-4.8-450-100	17.7"	450	4.8	125	50	22		
CT-4.8-500-100	19.7"	500	4.8	150	50	22		
CT-4.8-600-100	23.6"	600	4.8	170	50	22		
CT-7.6-150-100	6"	150	7.6	35	120	55	100PCS	
CT-7.6-200-100	8"	200	7.6	50	120	55		
CT-7.6-250-100	10"	250	7.6	65	120	55		
CT-7.6-300-100	12"	300	7.6	82	120	55		
CT-7.6-350-100	14"	350	7.6	90	120	55		
CT-7.6-370-100	14.6"	370	7.6	102	120	55		
CT-7.6-400-100	16"	400	7.6	105	120	55		
CT-7.6-450-100	18"	450	7.6	118	120	55		
CT-7.6-500-100	20"	500	7.6	150	120	55		
CT-7.6-550-100	21.6"	550	7.6	165	120	55		
CT-8.8-400-100	16"	400	8.8	105	175	79.4	100PCS	
CT-8.8-450-100	18"	450	8.8	130	175	79.4		
CT-8.8-500-100	20"	500	8.8	150	175	79.4		
CT-8.8-550-100	21.6"	550	8.8	165	175	79.4		
CT-8.8-600-100	23.6"	600	8.8	170	175	79.4		
CT-8.8-650-100	25.6"	650	8.8	190	175	79.4		
CT-8.8-710-100	28"	710	8.8	195	175	79.4		
CT-8.8-760-100	30"	760	8.8	220	175	79.4		
CT-8.8-800-100	31.5"	800	8.8	230	175	79.4		
CT-8.8-920-100	36.2"	920	8.8	265	175	79.4		
CT-8.8-1000-100	40"	1000	8.8	295	175	79.4	100PCS	
CT-8.8-1200-100	48"	1200	8.8	345	175	79.4		
CT-12-650-100	25.6"	650	12	165	250	114		
CT-12-750-100	29.5"	750	12	225	250	114		

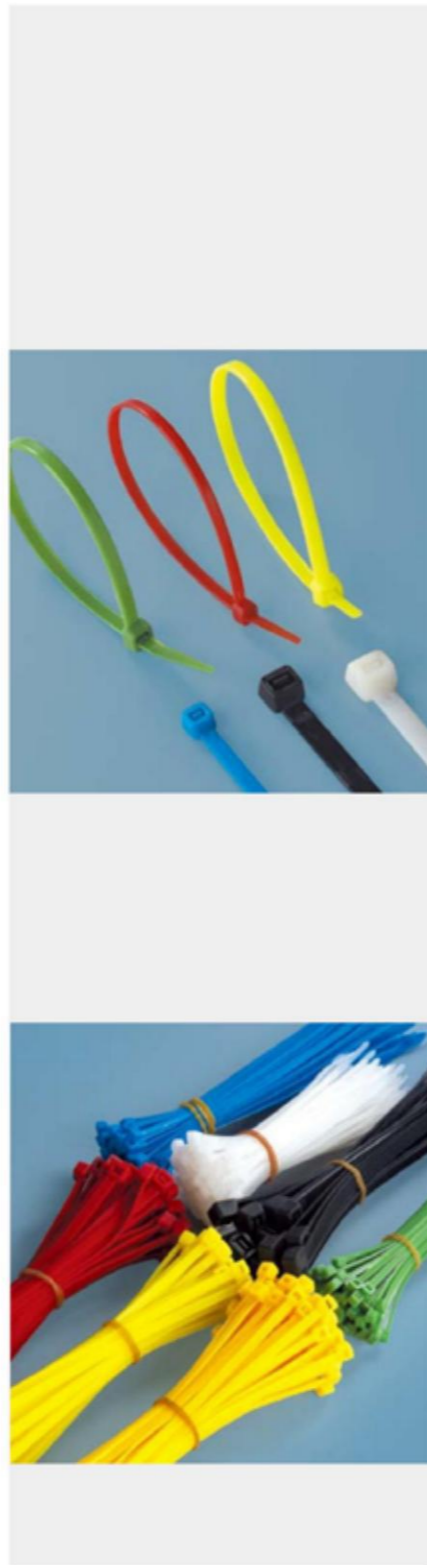

可松式尼龙扎带 Releasable Cable Ties


材质: 采用UL认可之尼龙66料制成, 防火等级94V-2, 耐酸碱、不易老化。
颜色: 标准色为白色(白色), 另备有黑色, 特殊颜色欢迎订做。

特点: 可再松开, 重复使用。

Material: Nylon 66, 94V-2 qualified by UL, resistance to acids and alkalis, not apt to age.

Color: Natural (or white, standard color), black and other colors are available as requested.

Character: May be loosen again, and used repeatedly.



型号 Type	长 L		宽 W(mm)	最大束径(mm) Max. bundle dia.	承受力 Tensile strength	
	Inch	mm			lbs	kgs
CT-A-7.6-150	6"	150	7.6	35	50	22
CT-A-7.6-200	8"	200	7.6	50	50	22
CT-A-7.6-250	10"	250	7.6	65	50	22
CT-A-7.6-300	12"	300	7.6	80	50	22

固定头式扎线带 Mountable Head Ties

材质: UL认可之尼龙66料制成。

特点: 扎带捆扎电线后, 将束束电线螺丝固定于基板上。

Material: Nylon 66 certificated by UL.

Usage: After bundling wires, fix them on plate with screw.




型号 Type	长 L		宽 W(mm)	内孔 (mm)	最大束径(mm) Max. bundle dia.	承受力 Tensile strength	
	Inch	mm				lbs	kgs
CT-M-3.6-100	4"	100	3.6	3.5	22	40	18
CT-M-3.6-150	6"	150	3.6	3.5	32	40	18
CT-M-3.6-200	8"	200	3.6	3.5	50	40	18
CT-M-4.8-220	8.6"	220	4.8	5.0	55	50	22

标牌式尼龙扎带 Brand Plate Type Cable Ties


材质: 采用UL认可之尼龙66料制成, 防火等级94V-2, 耐酸、耐蚀、绝缘性良好, 不易老化、承受力强。
颜色: 标准色为白色(白色), 另备有黑色, 特殊颜色欢迎订做。

Material: Nylon 66, 94V-2 certificated by UL, heat-resisting, erosion control, insulate well and not apt to age.

Color: Natural (or white, standard color), black and other colors are available as requested.



型号 Type	长 L		宽 W(mm)	最大束径(mm) Max. bundle dia.	拉力 Min tensile strength		标牌尺寸 Size
	Inch	mm			lbs	kgs	
CT-U-2.5-110	4"	110	2.5	22	18	8	20 × 13
CT-U-2.5-100	4"	100	2.5	22	18	8	20 × 10
CT-U-3.6-150	6"	150	3.6	35	40	18	25 × 15
CT-U-3.6-200	8"	200	3.6	50	40	18	25 × 15

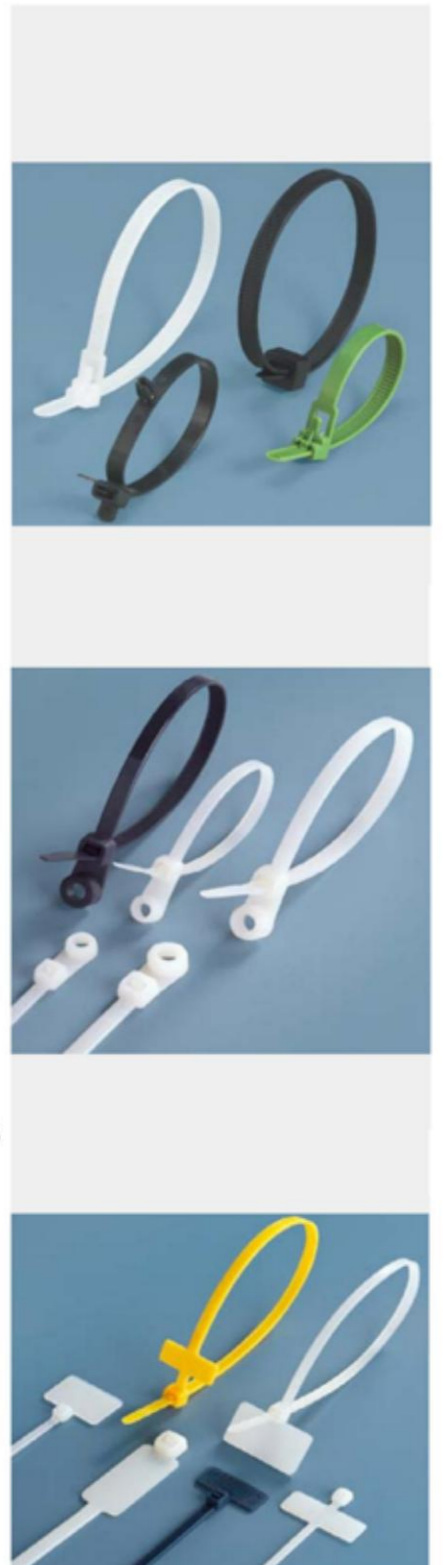

珠型束线带 Knot Ties Ball Type

材质: UL合格之尼龙66(本色)料制成, 防火等级94V-2。
用途: 一般电源之绑扎, 可再松开重复使用。

Material: Made of UL approved nylon 66 (nature color), fireproof grade is 94V-2.
Usage: Tied by general wire, it can loose again to repeat usage.

型号 Type	长L		最大束线径(mm) Max. bundle dia.
	Inch	mm	
CT-R-107	4"	107	25
CT-R-120	4.7"	120	30
CT-R-160	6.3"	160	40
CT-R-165	6.5"	165	42
CT-R-180	7.1"	180	50
CT-R-215	8.5"	215	55

鱼骨束线带 Fish Bone Shape Head Ties

材质: PE料制成, 本色白色, 另备有黑色。
使用方法: 先将电源线穿过A处, 使结束带与电源线连为一体, 然后将电线卷起, 将结束带扣上即可。
用途: 一般电源线收线用。

Material: Made of PE material, nature is white, also prepared black.
How to use: First the wire passes through A, connect the binding band with wire, then roll the wire, tie binding band.
Application: Drawing for general wire.

型号 Type	长 L(mm)	宽 W(mm)	最大束线径(mm) Max. bundle dia.
FISH-CT-9-160	160	9	40
FISH-CT-6-160	160	4	40
FISH-CT-9-200	200	9	50
FISH-CT-9-210	210	9	55

梯形扎线带 Trapezia Type

材质: PE料制成, 本色白色, 另备有黑色。
使用方法: 先将电源线穿过A处, 使结束带与电源线连为一体, 然后将电线卷起, 将结束带扣上即可。
用途: 一般电源线收线用。

Material: Made of PE material, nature is white, also prepared black.
How to use: First the wire passes through A, connect the binding band with wire, then roll the wire, tie binding band.
Application: Drawing for general wire.

型号 Type	长 L(mm)	宽 W(mm)	最大束线径(mm) Max. bundle dia.
T-CT-9-125	125	9	30
T-CT-9-140	140	9	37
T-CT-9-150	150	9	40
T-CT-9-180	180	9	50
T-CT-9-210	210	9	53
T-CT-9-300	300	4	80



双头扎线带 Double Head Cable Ties

材质: 采用UL认可之尼龙66料制成, 防火等级94V-2,耐酸、耐蚀、绝缘性良好, 不易老化、承受力强。
颜色: 标准色为本色(白色), 另备有黑色, 特殊颜色欢迎订做。

Material: Nylon 66,94V-2 certified by UL, heat-resisting, erosion control, insulate well and not apt to age.
Color: Natural (or white, standard color), black and other colors are available ad requested.



型号 Type	长L		宽W mm(inch)	D1		D2		承受力	
	inch	mm		MAX	MIN	MAX	MIN	lbs	kgs
DH-CT-4.8-300	12	300	4.8	2.5	7.6	76	2.0	50	22

插销式扎线带 Push Mount Ties

材质: 采用UL认可之尼龙66料制成, 防火等级94V-2, 耐酸、耐蚀、绝缘性良好, 不易老化、承受力强。
使用方法: 先将机板穿孔, 然后把扎带插入孔内, 再将电线扎紧即可。

Material: Nylon66, 94V-2, agreed by UL. Acid and corrode resisting, insulate, last long and not apt to age.
Usage: Insert tie to the hole of table and tighten it.




型号 Type	长L		宽W (mm)	最大束线径(mm) Max. bundle dia.	拉力Min tensile strength		包装 Packing
	Inch	mm			lbs	kgs	
PM-CT-2.5-110	4"	110	2.5	22	18	8	100PCS
PM-CT-3.2-120	4.7	120	3.2	30	40	18	
PM-CT-3.6-155	6"	155	3.6	35	40	18	
PM-CT-8-170	66/9"	170	8	37	40	18	

铅封式扎线带 Lead Sealing Ties

材质: UL合格之尼龙66料(本色), 防火等级94V-2。
特点: 适用于邮政、物流、银行、运输、食品包装之铅封识别用, 其标示牌尺寸随客户需求改变或定制。

Material: Made of UL approved NYLON 66 (nature color), fireproof grade is 94V-2.
Characteristic: It is suitable for identifying the lead seal of postal service, physical distribution, bank, transportation package. The nameplate size is changed or customized according to customer requirement.


型号 Type	长L mm	宽W (mm)	最大束线径(mm) Max. bundle dia.	承受力 Tensile strength	标示牌Nameplate
LS-CT-2.5-4	4"	2.5	22	8	39.5 × 12
LS-CT-2.5-4S	4"	2.5	22	8	25 × 22

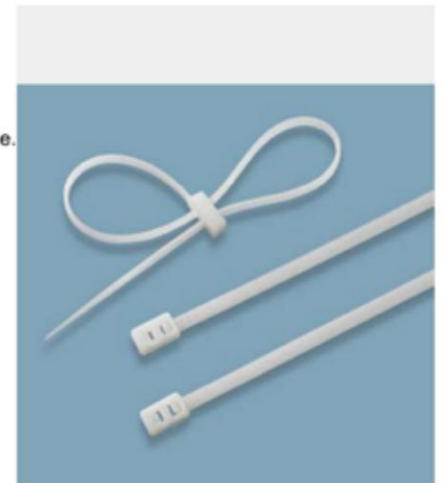


固定头式扎线带 Mountable Head Ties

材质: 采用UL认可之尼龙66料制成, 防火等级94V-2,耐酸、耐蚀、绝缘性良好, 不易老化、承受力强。
颜色: 标准色为本色(白色), 另备有黑色, 特殊颜色欢迎订做。

Material: Nylon 66,94V-2 certified by UL, heat-resisting, erosion control, insulate well and not apt to age.
Color: Natural (or white, standard color), black and other colors are available ad requested.

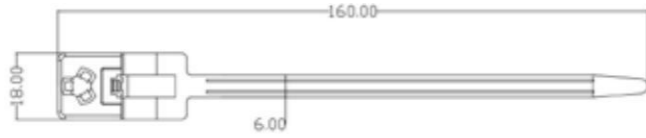

型号 Type	长L		宽W mm(inch)	最大束线径	承受力	
	inch	mm			lbs	kgs
MH-CT-6-160	6.3	160	6	40	50	22

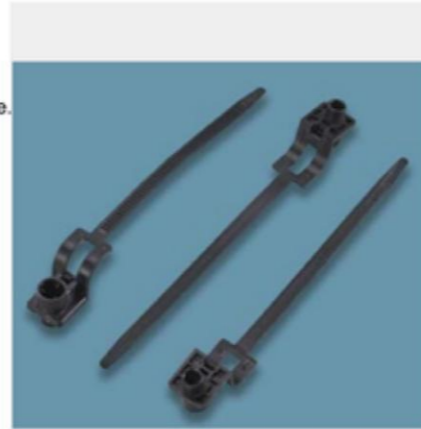

固定头式扎线带 Mountable Head Ties

材质: 采用UL认可之尼龙66料制成, 防火等级94V-2,耐酸、耐蚀、绝缘性良好, 不易老化、承受力强。
颜色: 标准色为本色(白色), 另备有黑色, 特殊颜色欢迎订做。

Material: Nylon 66,94V-2 certified by UL, heat-resisting, erosion control, insulate well and not apt to age.
Color: Natural (or white, standard color), black and other colors are available ad requested.



型号 Type	长L		宽W mm(inch)	最大束线径	承受力	
	inch	mm			lbs	kgs
MH-CT-4-7-200	8	200	4.7	50	50	22



固定头式扎线带 Mountable Head Ties

材质: 采用UL认可之尼龙66料制成, 防火等级94V-2,耐酸、耐蚀、绝缘性良好, 不易老化、承受力强。
颜色: 标准色为本色(白色), 另备有黑色, 特殊颜色欢迎订做。

Material: Nylon 66,94V-2 certified by UL, heat-resisting, erosion control, insulate well and not apt to age.
Color: Natural (or white, standard color), black and other colors are available ad requested.




型号 Type	长L		宽W mm(inch)	最大束线径	承受力	
	inch	mm			lbs	kgs
MH-CT-5-170	7	170	5	45	50	22



固定头式扎线带 Mountable Head Ties

材质: 采用UL认可之尼龙66料制成, 防火等级94V-2,耐酸、耐蚀、绝缘性良好, 不易老化、承受力强。
颜色: 标准色为本色(白色), 另备有黑色, 特殊颜色欢迎订做。

Material: Nylon 66,94V-2 certified by UL, heat-resisting, erosion control, insulate well and not apt to age.
Color: Natural (or white, standard color), black and other colors are available ad requested.

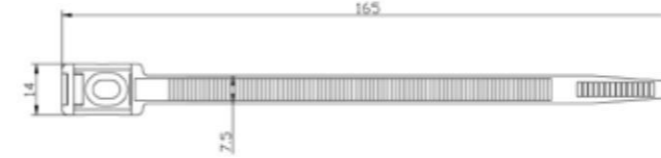


型号 Type	长L		宽W mm(inch)	最大束线径	承受力	
	inch	mm			lbs	kgs
MH-CT-7.5-165	6.6	165	7.5	35	120	55



螺旋式扎线带 Screw Mount Ties

材质: 采用UL认可之尼龙66料制成, 防火等级94V-2,耐酸、耐蚀、绝缘性良好, 不易老化、承受力强。
颜色: 标准色为本色(白色), 另备有黑色, 特殊颜色欢迎订做。

Material: Nylon 66,94V-2 certified by UL, heat-resisting, erosion control, insulate well and not apt to age.
Color: Natural (or white, standard color), black and other colors are available ad requested.

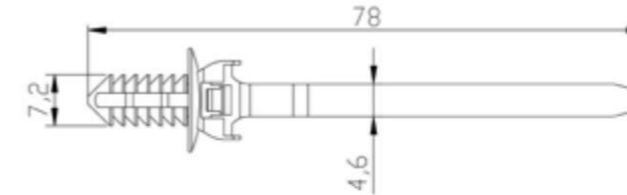

型号 Type	长L		宽W mm(inch)	最大束线径	承受力	
	inch	mm			lbs	kgs
SM-CT-4-6-78	3	78	4.6	15	50	22



螺旋式扎线带 Screw Mount Ties

材质: 采用UL认可之尼龙66料制成, 防火等级94V-2,耐酸、耐蚀、绝缘性良好, 不易老化、承受力强。
颜色: 标准色为本色(白色), 另备有黑色, 特殊颜色欢迎订做。

Material: Nylon 66,94V-2 certified by UL, heat-resisting, erosion control, insulate well and not apt to age.
Color: Natural (or white, standard color), black and other colors are available ad requested.




型号 Type	长L		宽W mm(inch)	最大束线径	承受力	
	inch	mm			lbs	kgs
SM-CT-4-7-170	6.7	170	4.7	45	50	22



插销式扎线带 Push Mount Ties

材质: 采用UL认可之尼龙66制成, 防火等级94V-2,耐酸、耐蚀、绝缘性良好, 不易老化、承受力强。
颜色: 标准色为本色(白色), 另有黑色, 特殊颜色欢迎订做。

Material: Nylon 66,94V-2 certified by UL, heat-resisting, erosion control, insulate well and not apt to age.
Color: Natural (or white, standard color), black and other colors are available ad requested.

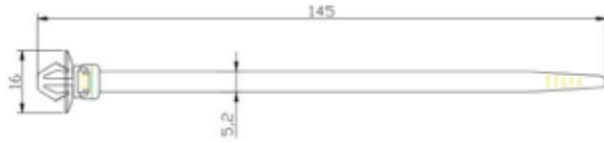


型号 Type	长L		宽W mm(inch)	最大束线径	承受力	
	inch	mm			lbs	kgs
PM-CT-5.2-145	5.7	145	5.2	34	50	22



插销式扎线带 Push Mount Ties

材质: 采用UL认可之尼龙66制成, 防火等级94V-2,耐酸、耐蚀、绝缘性良好, 不易老化、承受力强。
颜色: 标准色为本色(白色), 另有黑色, 特殊颜色欢迎订做。

Material: Nylon 66,94V-2 certified by UL, heat-resisting, erosion control, insulate well and not apt to age.
Color: Natural (or white, standard color), black and other colors are available ad requested.

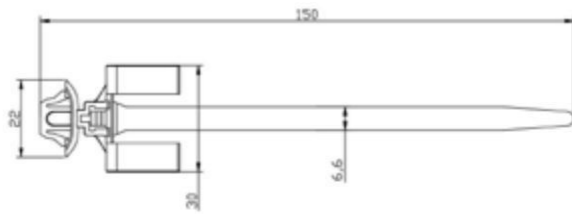

型号 Type	长L		宽W mm(inch)	最大束线径	承受力	
	inch	mm			lbs	kgs
PM-CT-6.2-150	5.9	150	6.6	35	50	22




插销式扎线带 Push Mount Ties

材质: 采用UL认可之尼龙66制成, 防火等级94V-2,耐酸、耐蚀、绝缘性良好, 不易老化、承受力强。
颜色: 标准色为本色(白色), 另有黑色, 特殊颜色欢迎订做。

Material: Nylon 66,94V-2 certified by UL, heat-resisting, erosion control, insulate well and not apt to age.
Color: Natural (or white, standard color), black and other colors are available ad requested.



型号 Type	长L		宽W mm(inch)	最大束线径	承受力	
	inch	mm			lbs	kgs
PM-CT-6.2-130	5.1	130	6.2	32	50	22

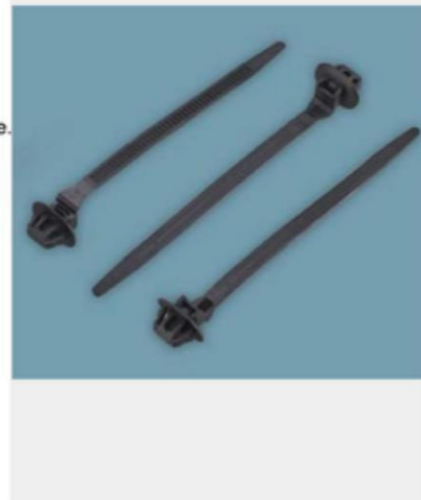

尼龙不锈钢嵌片扎带 Nylon Stainless Steel Inlay Blockties

材质及特点: 采用UL认可之尼龙66, 防火等级94V-2, 耐酸、耐久性不易老化, 承受力强

颜色: 标准颜色为本色(白色), 另有抗紫外线之黑色

使用: 室内外都适用, 非常方便及快速安装


工作温度: -40℃~85℃

Material: Nylon 66, 94V-2 certified by UL, fireproof grade 94V-2, acid, durability is not easy to aging, to withstand strong

Color: Natural (or white, standard color), also prepared UV resistant black

Use: Both indoor and outdoor application, very easy and quick installation


Operating temperature: -40℃ ~ 85℃




型号 Type	长度 Approx. length mm(inch)	宽度 Approx width mm(inch)	捆绑直径 Max. bundle dia. mm(inch)	拉力 min. loop tensile strengty N(lbs)
CT-AM-3-100-100	100(3.94)	3(0.118)	22(0.87)	80(18)
CT-AM-4-150-100	150(5.91)	4(0.157)	35(1.38)	160(36)
CT-AM-4-200-100	200(7.87)	4(0.157)	53(2.09)	160(36)
CT-AM-5-250-100	250(9.84)	5(0.197)	65(2.56)	200(45)
CT-AM-4-300-100	300(11.81)	5(0.197)	76(2.99)	200(45)
CT-AM-6-200-100	200(7.87)	6(0.236)	53(2.09)	220(49.5)
CT-AM-8-145-100	145(5.7)	8(0.315)	34(1.33)	250(56.3)
CT-AM-8-175-100	175(6.89)	8(0.315)	43(1.69)	250(56.3)
CT-AM-8-200-100	200(7.87)	8(0.315)	53(2.09)	250(56.3)
CT-AM-8-240-100	240(9.45)	8(0.315)	64(2.52)	250(56.3)
CT-AM-8-300-100	300(11.81)	8(0.315)	76(2.99)	250(56.3)
CT-AM-8-400-100	400(15.75)	8(0.315)	102(4.02)	500(112.5)
CT-AM-10-300-100	300(11.81)	10(0.394)	76(2.99)	500(112.5)
CT-AM-10-350-100	350(13.78)	10(0.394)	97(3.82)	500(112.5)
CT-AM-10-400-100	400(15.75)	10(0.394)	102(4.02)	550(123.7)
CT-AM-10-450-100	450(17.72)	10(0.394)	120(4.72)	550(123.7)
CT-AM-10-550-100	550 (21.65)	10 (0.394)	141 (5.55)	550 (123.7)
CT-AM-10-600-100	600(23.62)	10(0.394)	186(7.32)	550(123.7)

不锈钢喷塑扎带-可退式 Stainless Steel Epoxy Coated Cable Tie-Reusable Type

型号 Type	长度 Approx. length mm(inch)	宽度 Approx width mm(inch)	捆绑直径 Max. bundle dia. mm(inch)	拉力 min. loop tensile strengty N(lbs)
CT-SSE-10-150-100	150(5.9)	10(0.39)	33(1.3)	1000(225)
CT-SSE-10-190-100	190(7.5)		46(1.8)	
CT-SSE-10-250-100	250(9.8)		65(2.6)	
CT-SSE-10-300-100	300(11.8)		81(3.2)	
CT-SSE-10-350-100	350(13.8)		97(3.8)	
CT-SSE-10-400-100	400(15.7)		113(4.4)	
CT-SSE-10-450-100	450(17.7)		129(5.1)	
CT-SSE-10-490-100	490(19.3)		141(5.6)	
CT-SSE-10-550-100	550(21.7)		161(6.3)	
CT-SSE-10-600-100	600(23.6)		176(6.9)	
CT-SSE-10-650-100	650(25.6)		192(7.6)	
CT-SSE-10-700-100	700(27.6)		208(8.2)	

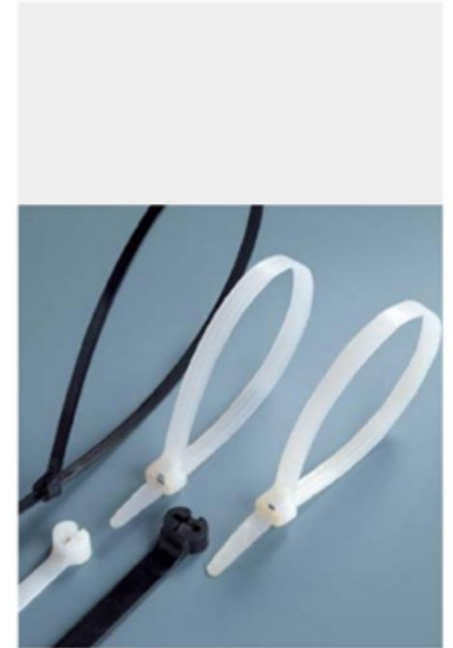


操作解图 Install




不锈钢扎带-滚珠锁紧式 Stainless Steel Cable Tie-Ball Lock Type

型号 Type	长度 Approx. length mm(inch)	宽度 Approx. width mm(inch)	捆带直径 Max bundle dia. mm(inch)	拉力 min. loop tensile strength N(lbs)		
CT-SSE-4.6-150-100	150(5.9)	4.6(0.181)	37(1.46)	600(135)		
CT-SSE-4.6-200-100	200(7.87)		50(1.97)			
CT-SSE-4.6-250-100	250(9.84)		63(2.48)			
CT-SSE-4.6-300-100	300(11.8)		76(2.99)			
CT-SSE-4.6-350-100	350(13.78)		89(3.5)			
CT-SSE-4.6-400-100	400(15.75)		102(4.02)			
CT-SSE-4.6-450-100	450(17.72)		115(4.53)			
CT-SSE-4.6-500-100	500(19.69)		128(5.04)			
CT-SSE-4.6-550-100	550(21.65)		141(5.55)			
CT-SSE-4.6-600-100	600(23.62)		154(6.06)			
CT-SSE-7.9-150-100	150(5.9)		7.9(0.311)		37(1.46)	800(180)
CT-SSE-7.9-200-100	200(7.87)				50(1.97)	
CT-SSE-7.9-250-100	250(9.84)	63(2.48)				
CT-SSE-7.9-300-100	300(11.8)	76(2.99)				
CT-SSE-7.9-350-100	350(13.78)	89(3.5)				
CT-SSE-7.9-400-100	400(15.75)	102(4.02)				
CT-SSE-7.9-450-100	450(17.72)	115(4.53)				
CT-SSE-7.9-500-100	500(19.69)	128(5.04)				
CT-SSE-7.9-550-100	550(21.65)	141(5.55)				
CT-SSE-7.9-600-100	600(23.62)	154(6.06)				
CT-SSE-7.9-650-100	650(25.59)	167(6.57)				
CT-SSE-7.9-700-100	700(27.56)	180(7.09)				
CT-SSE-7.9-750-100	750(29.53)	191(7.52)				
CT-SSE-7.9-800-100	800(31.5)	193(7.59)				
CT-SSE-12-150-100	150(5.9)	12(0.472)	37(1.46)	1200(270)		
CT-SSE-12-200-100	200(7.87)		50(1.97)			
CT-SSE-12-250-100	250(9.84)		63(2.48)			
CT-SSE-12-300-100	300(11.8)		76(2.99)			
CT-SSE-12-350-100	350(13.78)		89(3.5)			
CT-SSE-12-400-100	400(15.75)		102(4.02)			
CT-SSE-12-450-100	450(17.72)		115(4.53)			
CT-SSE-12-500-100	500(19.69)		128(5.04)			
CT-SSE-12-550-100	550(21.65)		141(5.55)			
CT-SSE-12-600-100	600(23.62)		154(6.06)			
CT-SSE-12-650-100	650(25.59)		167(6.57)			
CT-SSE-12-700-100	700(27.56)		180(7.09)			
CT-SSE-15-200-100	200(7.87)	15(0.59)	50(1.97)	1500(337)		
CT-SSE-15-250-100	250(9.84)		63(2.48)			
CT-SSE-15-300-100	300(11.8)		76(2.99)			
CT-SSE-15-350-100	350(13.78)		89(3.5)			
CT-SSE-15-400-100	400(15.75)		102(4.02)			
CT-SSE-15-450-100	450(17.72)		115(4.53)			
CT-SSE-15-500-100	500(19.69)		128(5.04)			
CT-SSE-15-550-100	550(21.65)		141(5.55)			
CT-SSE-15-600-100	600(23.62)		154(6.06)			
CT-SSE-15-650-100	650(25.59)		167(6.57)			
CT-SSE-15-700-100	700(27.56)		180(7.09)			
CT-SSE-15-750-100	750(29.53)		191(7.52)			
CT-SSE-15-800-100	800(31.5)	193(7.59)				
CT-SSE-15-1000-100	1000(39.37)	206(8.11)				

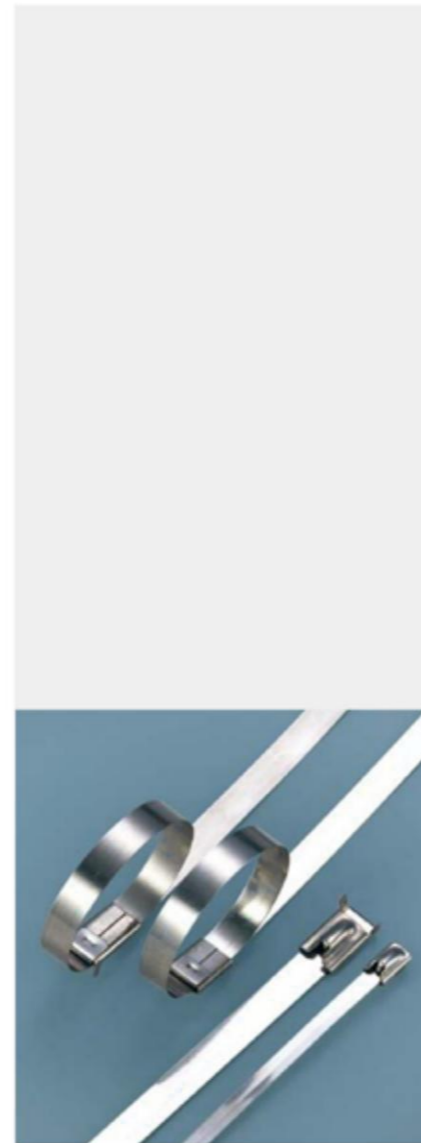


不锈钢扎带-阶梯形单勾锁紧式 Stainless-Steel Cable Tie-Ladder Single Barb Lock Type

操作解图 Install

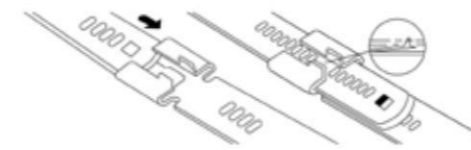

型号 Type	长度 Approx. length mm(inch)	宽度 Approx. width mm(inch)	捆带直径 Max bundle dia. mm(inch)	拉力 min. loop tensile strength N(lbs)
CT-SSC-7-150-100	150(5.9)	7(0.276)	33(1.3)	600(135)
CT-SSC-7-225-100	225(8.86)		57(2.2)	
CT-SSC-7-300-100	300(11.8)		81(3.2)	
CT-SSC-7-335-100	335(13.2)		92(3.6)	
CT-SSC-7-400-100	400(15.7)		113(4.4)	
CT-SSC-7-450-100	450(17.7)		129(5.1)	
CT-SSC-7-490-100	490(19.3)		141(5.6)	
CT-SSC-7-550-100	550(21.7)		161(6.3)	
CT-SSC-7-600-100	600(23.6)		176(6.9)	
CT-SSC-7-650-100	650(25.6)		192(7.6)	
CT-SSC-7-700-100	700(27.6)		208(8.2)	
CT-SSC-7-750-100	750(29.5)		224(8.8)	
CT-SSC-7-800-100	800(31.5)	240(9.4)		

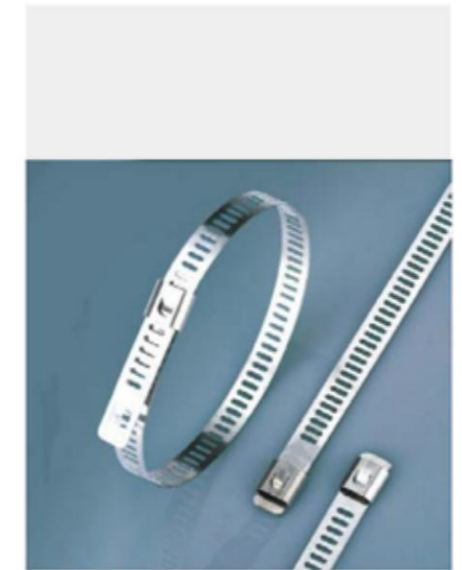

不锈钢扎带-D型锁紧式 Stainless Steel Cable Tie-Ring Type

型号 Type	长度 Approx. length mm(inch)	宽度 Approx. width mm(inch)	捆带直径 Max bundle dia. mm(inch)	拉力 min. loop tensile strength N(lbs)
CT-SSC-D-10-150-100	150(5.9)	10(0.39)	37(1.46)	1000(225)
CT-SSC-D-10-200-100	200(7.87)		50(1.97)	
CT-SSC-D-10-250-100	250(9.84)		63(2.48)	
CT-SSC-D-10-300-100	300(11.8)		76(2.99)	
CT-SSC-D-10-350-100	350(13.78)		89(3.5)	
CT-SSC-D-10-400-100	400(15.75)		102(4.02)	
CT-SSC-D-10-450-100	450(17.72)		115(4.53)	
CT-SSC-D-10-500-100	500(19.69)		128(5.04)	
CT-SSC-D-10-550-100	550(21.65)		141(5.55)	
CT-SSC-D-10-600-100	600(23.62)		154(6.06)	
CT-SSC-D-10-650-100	650(25.6)		167(6.57)	
CT-SSC-D-12-150-100	150(5.9)		12(0.47)	
CT-SSC-D-12-200-100	200(7.87)	50(1.97)		
CT-SSC-D-12-250-100	250(9.84)	63(2.48)		
CT-SSC-D-12-300-100	300(11.8)	76(2.99)		
CT-SSC-D-12-350-100	350(13.78)	89(3.5)		
CT-SSC-D-12-400-100	400(15.75)	102(4.02)		
CT-SSC-D-12-450-100	450(17.72)	115(4.53)		
CT-SSC-D-12-500-100	500(19.69)	128(5.04)		
CT-SSC-D-12-550-100	550(21.65)	141(5.5)		
CT-SSC-D-12-600-100	600(23.62)	154(6.06)		
CT-SSC-D-12-650-100	650(25.6)	167(6.57)		
CT-SSC-D-12-700-100	700(27.6)	180(7.09)		
CT-SSC-D-12-800-100	800(31.5)	193(7.59)		



不锈钢扎带-L型锁紧式 Stainless Steel Cable Tie-Wing Lock Type


材料: 采用不锈钢304、316材质, 各种长度皆可制作, 特殊规格按客户供样制作。
特性: 耐酸、耐腐蚀、抗张强度大, L型突起式结构使得HDLS型扎带具有简单、快捷等优势。
工作温度范围: -60-150℃

Material: stainless steel 304, 316, can produce a variety of lengths, special specifications according to customers samples of production.
Features: resistance Acid, corrosion resistance, tensile strength, L-type HDLS protruding structure makes cable tie simple, fast and other advantages.
Operating temperature range: -60-150 °C

型号 Type	长度 Approx. length mm(inch)	宽度 Approx. width mm(inch)	捆绑直径 Max bundle dia. mm(inch)	拉力 min. loop tensile strength N(lbs)
CT-SSC-T-12-150-100	150(5.9)	12(0.472)	37(1.46)	1200(270)
CT-SSC-T-12-200-100	200(7.87)		50(1.97)	
CT-SSC-T-12-250-100	250(9.84)		63(2.48)	
CT-SSC-T-12-300-100	300(11.8)		76(2.99)	
CT-SSC-T-12-350-100	350(13.78)		89(3.5)	
CT-SSC-T-12-400-100	400(15.75)		102(4.02)	
CT-SSC-T-12-450-100	450(17.72)		115(4.53)	
CT-SSC-T-12-500-100	500(19.69)		128(5.04)	
CT-SSC-T-12-550-100	550(21.65)		141(5.55)	
CT-SSC-T-12-600-100	600(23.62)		154(6.06)	
CT-SSC-T-12-650-100	650(25.6)		167(6.57)	
CT-SSC-T-15-700-100	700(27.6)		180(7.09)	
CT-SSC-T-15-800-100	800(31.5)	193(7.59)		
CT-SSC-T-15-200-100	200(7.87)	50(1.97)		
CT-SSC-T-15-250-100	250(9.84)	63(2.48)		
CT-SSC-T-15-300-100	300(11.8)	76(2.99)		
CT-SSC-T-15-350-100	350(13.78)	89(3.5)		
CT-SSC-T-15-400-100	400(15.75)	102(4.02)		
CT-SSC-T-15-450-100	450(17.72)	115(4.53)		
CT-SSC-T-15-500-100	500(19.69)	128(5.04)		
CT-SSC-T-15-550-100	550(21.65)	141(5.55)		
CT-SSC-T-15-600-100	600(23.62)	154(6.06)		
CT-SSC-T-15-650-100	650(25.59)	167(6.57)		
CT-SSC-T-15-700-100	700(27.56)	180(7.09)		
CT-SSC-T-15-750-100	750(29.53)	191(7.52)		
CT-SSC-T-15-800-100	800(31.5)	193(7.59)		
CT-SSC-T-15-1000-100	1000(39.37)	206(8.11)		

不锈钢扎带-合紧式 Stainless Steel Strapping

型号 Type	长度 Approx. length mm(inch)	宽度 Approx. width mm(inch)	厚度 Approx. thickness mm(inch)	捆绑直径 Max bundle dia. mm(inch)	拉力 min. loop tensile strength N(lbs)
CT-AU-9.5-300-100	300(11.6)	9.5(0.38)	0.38(0.015)	52(2)	1000(225)
CT-AU-9.5-457-100	457(18)	9.5(0.38)	0.38(0.015)	102(4.7)	1000(225)
CT-AU-9.5-620-100	620(24.4)	9.5(0.38)	0.38(0.015)	152(6)	1000(225)
CT-AU-12-457-100	457(18)	12(0.5)	0.38(0.015)	102(4.7)	1200(270)
CT-AU-12-620-100	620(24.4)	12(0.5)	0.38(0.015)	152(6)	1200(270)
CT-AU-12-780-100	780(30.7)	12(0.5)	0.38(0.015)	203(8)	1200(270)
CT-AU-12-940-100	940(37)	12(0.5)	0.38(0.015)	254(10)	1200(270)
CT-AU-15.9-780-100	780(30.7)	15.9(0.63)	0.38(0.015)	203(8)	1500(337)
CT-AU-15.9-940-100	940(37)	15.9(0.63)	0.38(0.015)	254(10)	1500(337)

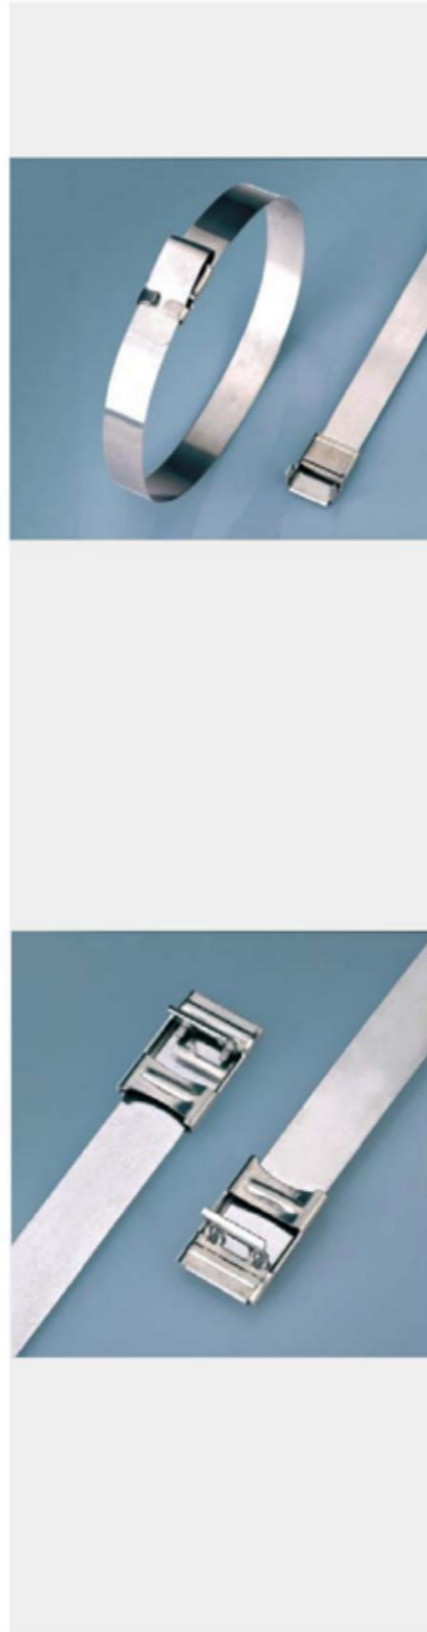


扎带超值包装系列 Value Pack Series

ITEM NO.	AMUR-CT-150	
AMUR-CT-150	2.5 × 100mm 4"	50PCS
	2.5 × 120mm 4.7"	50PCS
	3.6 × 200mm 8"	50PCS
AMUR-CT-CPS	46 × 24 × 44cm	
AMUR-CT-CPS-100	64SETS/CTN (32SETS/INNER BOX)	
AMUR-CT-CPS-1000	DIA: Φ5.5cm, HEIGHT: 21cm	

ITEM NO.	AMUR-CT-200	
AMUR-CT-200	.5 × 100mm 4"	50PCS
	2.5 × 100mm 4"	50PCS
	2.5 × 150mm 6"	50PCS
	3.6 × 200mm 8"	50PCS
AMUR-CT-VPS	46 × 24 × 44cm	
AMUR-CT-VPS-100	64SETS/CTN (32SETS/INNER BOX)	
AMUR-CT-VPS-1000	DIA: Φ5.5cm, HEIGHT: 21cm	

ITEM NO.	AMUR-CT-25	
AMUR-CT-250	2.5 × 100mm 4"	50PCS
	2.5 × 100mm 4"	50PCS
	2.5 × 100mm 4"	50PCS
	2.5 × 100mm 4"	50PCS
	2.5 × 100mm 4"	50PCS
AMUR-CT-RPS	46 × 24 × 44cm	
AMUR-CT-RPS-100	64SETS/CTN (32SETS/INNER BOX)	
AMUR-CT-RPS-1000	DIA: Φ5.5cm, HEIGHT: 21cm	

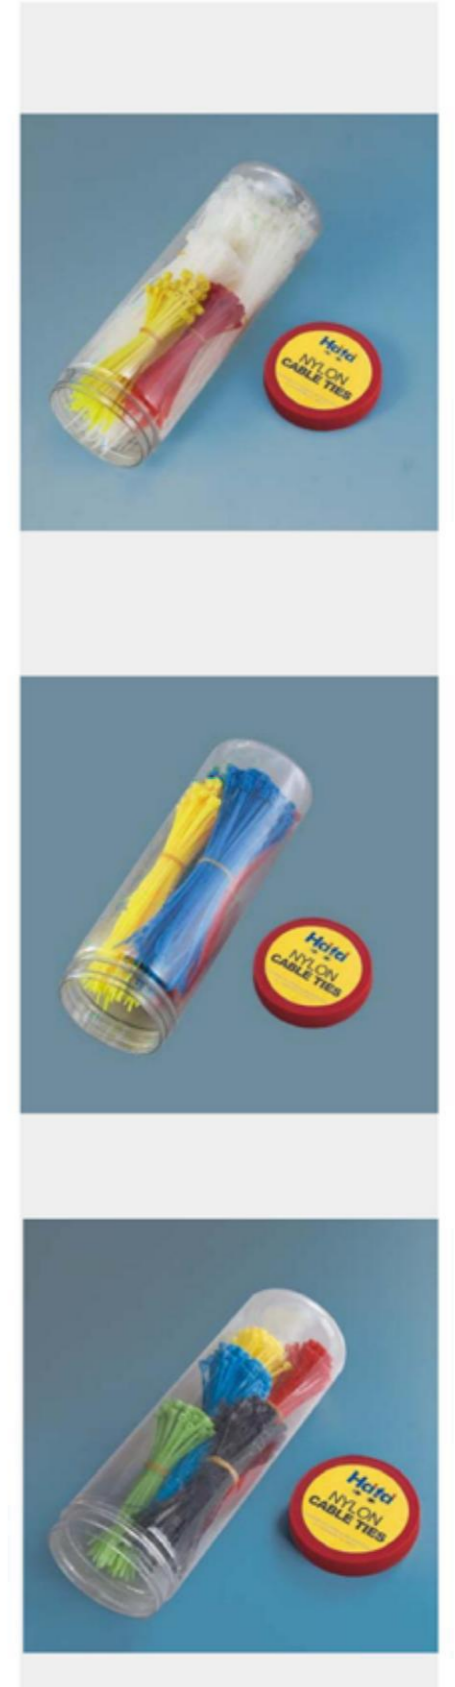


尼龙电缆固定头 NYLON CABLE GLANDS

- 材质：尼龙，防火等级 94V-2，夹紧圈为耐由橡胶材质
- 特点：1. 夹紧圈经特殊设计，拉力强，对电机不造成损伤
2. 不须将固定头解体，电缆可直接穿入上紧即可，省时方便
- 用途：一般机械控制箱、配电盘、机器、电器等电缆固定用

Material: Made from UL Nylon 66, 94V-2 and tight ring from rubber;

Feature: 1. Special designation, good strength and none damage to electrical machine; 2. not need to disassemble the fix terminal, cable can be inserted through directly then tighten easy and save time;

Application: used for machinery control box, distribution plate, machine and electrical, etc.

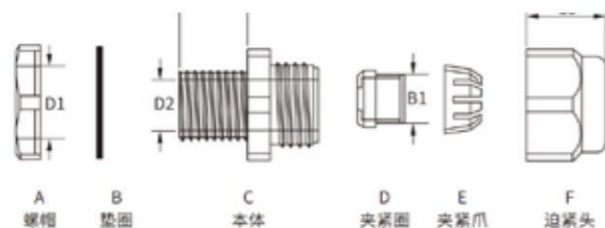

型号 Type	D1	D2	B1	范围 Cable range
PG-07	10.9	8.1	6.4	3.5-6
PG-09	15.3	12.2	8.6	4-8
PG-11	17.9	14.6	10.7	5-10
PG-13.5	20.2	16.2	13.3	6-12
PG-16	21.3	18.3	14.3	10-14
PG-19	24.7	20.5	15.5	12-15
PG-21	26.9	21.8	16.7	13-18
PG-24	29.8	25	19.2	15-22
PG-29	35.1	29.8	24.8	18-25
PG-36	44.7	37.1	30.7	22-32
PG-42	50.4	43.3	35.6	30-38
PG-48	56.1	48.2	41.4	34-44
PG-63	71	63.5	55	42-54

型号 Type	D1	D2	B1	范围 Cable range
M12	10.9	8.1	6.4	3.5-6
M16	15.3	12.2	8.6	4-8
M18	17.9	14.6	10.7	5-10
M20	20.2	16.2	13.3	6-12
M22	21.3	18.3	14.3	10-14
M24	24.7	20.5	15.5	12-15
M27	26.9	21.8	16.7	13-18
M32	29.8	25	19.2	15-22
M36	35.1	29.8	24.8	18-25
M40	44.7	37.1	30.7	22-32
M50	50.4	43.3	35.6	30-38
M63	56.1	48.2	41.4	34-44



MGM系列金属电缆接头 COPPER CABLE GLANDS

型号 Type	适用电缆 Cable Range	螺纹外径 Thread O.D	螺纹长度 Thread Length	扳手尺寸 Spanner Size
MGM7	3-6.5	12.5	5	14
MGM9	4-8	15.2	6	17
MGM11	5-10	18.6	6	20
MGM13.5	6-12	20.4	6.5	22
MGM16	10-14	22.5	6.5	24
MGM19	12-15	28.3	7	30
MGM21	13-18	37	8	40
MGM25	16-22	47	8	50
MGM29	18-25	54	9	57
MGM36	22-33	59.3	10	64
MGM42	32-38	-	-	-
MGM48	37-44	-	-	-
MGM63	42-52	-	-	-




卷式结束保护带 (缠绕管) SPIRAL WRAPPING BANDS

- 材质：采用 PE 材料制成
- 使用方法：先用保护带固定起点一端，然后按顺时针方向环绕束紧，即可将电线束为一体
- 用途：作为保护电不受磨损及绝缘用，并可改进电线弯曲的美观

Material: made from PE;

How to use: fix one end with safety belt first, then circle the wires clockwise to make them tighten;

Application: a protection wear for electric wires, and make them insulation and look nice.

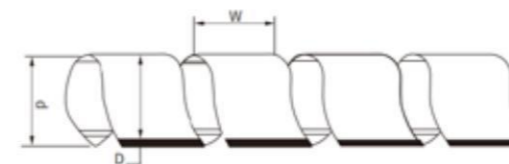

型号 Type	内径 (D) (mm)	外径 (d) (mm)	螺距 (W) (mm)	捆绑范围 Wrapping Range (mm)	包装 Packing
SWB-06	4	6	7.0	4-50	10M/ROLL
SWB-08	6	8	10.8	6-60	
SWB-10	7.5	10	11.4	7.5-60	
SWB-12	9	12	13.9	9-65	
SWB-15	12	15	15.0	12-75	
SWB-19	15	19	18.2	15-100	
SWB-24	20	24	19.6	20-130	



热收缩套管

HEAT SHRINKABLE TUBINGS

- 功能: 1. 电线之保护与绝缘
2. 端子与电线接头之绝缘与瓮中保护
3. 分色作用
4. 防水
5. 电阻电容器之保护与绝缘
- 颜色: 黑、白、红、蓝、黄、绿、棕、灰、橙、紫

Function: 1.Wire coat and insulation
2.Make the joint of terminal block and wire insulated
3.Divide the colors
4.Water-proof
5.Protection and insulation of insulators and electrical capacitors
Color: black, white, red, blue, yellow, green, brown, grey, orange and purple.



型号 Type	收缩前 As supplied		收缩后 After shrinkang		包装 Packing (M/roll)
	内径 1.D(mm)	厚度 Thickness	内径 1.D(mm)	厚度 Thickness	
DRS-1	1.0	0.2±0.05	0.5	0.4±0.05	400
DRS-1.5	1.5	0.2±0.05	0.75	0.4±0.05	300
DRS-2	2.0	0.2±0.05	1.0	0.45±0.1	200
DRS-2.5	2.5	0.2±0.05	1.25	0.45±0.1	
DRS-3	3.0	0.2±0.05	1.5	0.45±0.1	
DRS-3.5	3.5	0.2±0.05	1.75	0.45±0.1	100
DRS-4	4.0	0.2±0.05	2.0	0.45±0.1	
DRS-5	5.0	0.2±0.05	2.5	0.55±0.1	
DRS-6	6.0	0.2±0.05	3.0	0.55±0.1	
DRS-7	7.0	0.2±0.05	3.5	0.55±0.1	
DRS-8	8.0	0.2±0.05	4.0	0.55±0.1	
DRS-9	9.0	0.2±0.05	4.5	0.55±0.1	
DRS-10	10.0	0.2±0.05	5.0	0.60±0.1	
DRS-11	11.0	0.2±0.05	5.5	0.60±0.1	
DRS-12	12.0	0.35±0.05	6.0	0.70±0.1	
DRS-13	13.0	0.35±0.05	6.5	0.70±0.1	50
DRS-14	14.0	0.35±0.05	7.0	0.70±0.1	
DRS-15	15.0	0.35±0.05	7.5	0.70±0.1	
DRS-16	16.0	0.35±0.05	8.0	0.70±0.1	
DRS-18	18.0	0.4±0.05	9.0	0.80±0.1	
DRS-20	20.0	0.5±0.05	10.0	0.90±0.1	
DRS-22	22.0	0.5±0.05	11.0	0.90±0.1	
DRS-25	25.0	0.5±0.05	12.5	0.90±0.1	
DRS-28	28.0	0.5±0.05	14.0	0.90±0.1	
DRS-30	30.0	0.5±0.05	15.0	1.00±0.2	
DRS-35	35.0	0.5±0.05	17.5	1.00±0.2	
DRS-40	40.0	0.5±0.05	20.0	1.00±0.2	
DRS-50	50.0	0.5±0.05	25.0	1.00±0.2	
DRS-60	60.0	0.6±0.05	30.0	1.20±0.2	
DRS-70	70.0	0.6±0.05	35.0	1.20±0.2	
DRS-80	80.0	0.6±0.05	40.0	1.20±0.2	
DRS-90	90.0	0.6±0.05	45.0	1.30±0.2	
DRS-100	100.0	0.7±0.05	50.0	1.30±0.2	
DRS-120	120.0	0.7±0.05	60.0	1.30±0.2	
DRS-150	150.0	0.8±0.05	75.0	1.60±0.2	

LNE-WS 塑料波纹管

PLASTIC CORRUGATED PIPE


- 颜色: WS-PE 型黑灰色
- 材质: PA、PE、PP
- 特点: 柔韧性高、耐摩擦、耐悬挂、耐腐蚀、阻燃
- 温度范围: -20° C~+100° C

Color: WS-PE Type Black Grey;

Material: PA、PE、PP;

Characteristic: Flexibility is high, and able to bear rubbing, able to bearsuspendingschoolingto corrodes, fire-retardanting;

Temperature range: -20° C~+100° C.

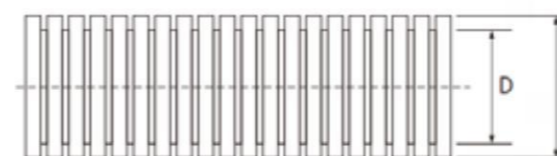

名称 Nouns	软管规格 Hose Specifications	内径 × 外径 (mm) Inside Diameter × Outer Diameter (mm)	包装单位 (米) Packaging Units (m)
PE 软管 PE hose	AD10.0	6.5×10.0	100
	AD13.0	10.0×13.0	100
	AD15.8	12.0×15.8	100
	AD18.5	14.3×18.5	100
	AD21.2	17.0×21.2	100
	AD25.0	20.0×25.0	50
	AD28.5	23.0×28.5	50
	AD34.5	29.0×34.5	50
	AD42.5	36.0×42.5	50
	AD54.5	48.0×54.5	25
PP 软管 (阻燃) PP hose (flame retardant)	AD10.0	6.5×10.0	100
	AD13.0	10.0×13.0	100
	AD15.8	12.0×15.8	100
	AD18.5	14.3×18.5	100
	AD21.2	17.0×21.2	100
	AD25.0	20.0×25.0	50
	AD28.5	23.0×28.0	50
	AD34.5	29.0×34.5	50
	AD42.5	36.0×42.5	50
	AD54.5	48.0×54.5	25
PA 软管 (尼龙阻燃) PA hose (nylon flame retardant)	AD10.0	6.5×10.0	100
	AD13.0	10.0×13.0	100
	AD15.8	12.0×15.8	100
	AD18.5	14.3×18.5	100
	AD21.2	17.0×21.2	100
	AD25.0	20.0×25.0	50
	AD28.5	23.0×28.5	50
	AD34.5	29.0×34.5	50
	AD42.5	36.0×42.5	50
	AD54.5	48.0×54.5	25



圆型、方型固定夹系列

CIRCLE CABLE CLIP AND SQUARE CABLE CLIP


- 材质：采用 PP 材料制成，附钢钉
- 使用方法：用电线置于卡内，用铁锤将钢钉钉于墙壁上即可将电线固定
- 用途：一般室内配线固定电线用

Material: Pp, steel nail;

How to use: put the cable wire in the clip and hammer the nail into the wall to fix the cable;

Application: securing of cables for general indoor wiring.


● 圆型固定夹 / CIRCLE CABLE CLIP



型号 Type	高 H(mm)	圆径 D(mm)	钢钉 Nail(mm)	包装 Packing
R-4mm	5.3	4	1.7×15	100PCS & 1000PCS
R-5mm	6.5	5	1.7×15	
R-6mm	8.1	6	1.7×17	
R-7mm	8.5	7	1.8×18	
R-8mm	8.7	8	1.9×18	
R-9mm	10.8	9	2.0×20	
R-10mm	11.8	10	2.1×23	100PCS&500PCS
R-12mm	13.8	12	2.3×25	
R-14mm	15.8	14	2.3×25	100PCS&250PCS
R-16mm	18.0	16	2.3×30	100PCS&200PCS
R-18mm	20.8	18	2.3×33	
R-20mm	23.5	20	2.8×38	100PCS
R-22mm	25.0	22	2.8×40	
R-25mm	28.0	25	2.8×45	
R-30mm	33.0	30	3.0×45	
R-32mm	35.0	32	3.2×55	
R-35mm	38.0	35	3.2×58	
R-40mm	45.0	40	3.5×60	



■ 方型固定夹 / SQUARE CABLE CLIP



型号 Type	高 H(mm)	内径		钢钉 Nail(mm)	包装 Packing
		H1(mm)	R(mm)		
F-4mm	6	3.8	8.1	1.7×15	100PCS & 1000PCS
F-5mm	6	3.8	5	1.7×15	
F-6mm	6.5	4.1	6	1.7×17	
F-7mm	7.0	4.7	7	1.9×18	
F-8mm	7.5	5.0	8	2.05×20	
F-9mm	8.2	5.4	9	2.05×23	
F-10mm	8.6	5.7	10	2.3×23	
F-12mm	9.0	6.1	12	2.3×25	
F-14mm	11	8.0	14	2.3×25	



定位片


CABLE TIE MOUNT

- 材质：采用 UL 认可之尼龙 66 制成，防火等级 94V-2。背附进口双面海面胶，绝缘性良好、耐久性、不易老化
- 使用方法：将定位片背面双面胶撕开，贴于机板固定，再用扎带捆扎电线
- 用途：供面板不可钻孔时使用

Material: Nylon 66, 94V-2, certificated by UL. Acid and corrode resisting, insulate, not to age. with imported double sided tape on the back;

How to use: remove the cover of the adhesive and stick the piece properly, then put in cable tie for using;

Application: used where hole-drilling is not allowed, easy and time-saving.

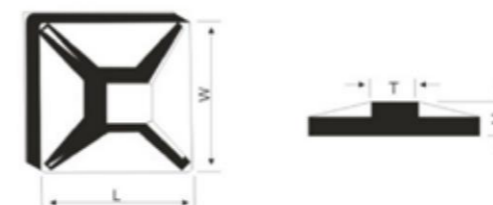

型号 Type	长×宽 L×W(mm)	高 H(mm)	带孔 T(mm)	包装 Packing
TM-20	20×20	6.1	5.0	100PCS&1000PCS
TM-25	25×25	7.5	6.2	100PCS&500PCS
TM-30	30×30	8.7	6.4	
TM-40	40×40	6.4	10.8	100PCS&250PCS



圆型号码管

CABLE MARKERS

- 材质：采用优质 PVC 料精制，形如倒凹形，套管上面印有文字代号，内径伸缩弹性很大
- 使用方法：使用时将每个切离处轻剥下，即可配线
- 特点：各种型号适合各种大小之配线，接受配线长度或特殊标志之订制

Material: Soft PVC, concave conversed shape, no. code in sleeve, elasticity of in-diameter;

How to use: Peel each hack lightly;

Feature: Suitable any size, special length and marking is available to order.



型号 Type	适用电线 Approx Wire		号码 Markers	包装 Packing
	SQ(平方) 非剩余	mm		
EC-0	0.75~1.5	2.0~3.2	0~9 A~Z +~/\	1000PCS/ROLL
EC-1	0.75~3.5	3.0~4.2		1000PCS/ROLL
EC-2	3.5~8.0	3.6~7.4		500PCS/ROLL
EC-3	5.2~10.0	5.2~10.0		350PCS/ROLL




膨胀管

EXPAND NAILS

- 材质：采用 PE 料制成
- 颜色：白色、灰色（特殊颜色欢迎定做）

Material: PE;

Color: white, grey (other colors are available if request)

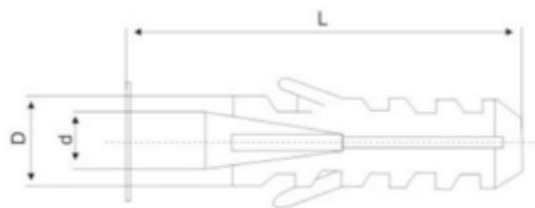

型号 Type	长 L(mm)	外径 D(mm)	内径 d(mm)	包装 Packing
SWB-06	30	5.9	4.9	100PCS & 500PCS
SWB-07	30	6.8	4.9	
SWB-08	40	7.9	5.3	
SWB-09	42	9	5.5	
SWB-10	43	9.9	5.8	
SWB-12	50	11.8	6.3	



螺旋式压线帽


SCREW ON WIRE CONNECTOR

- 材质：采用 UL 认可之尼龙 66 制成，防火等级 94V-2. 耐酸、耐蚀、绝缘性良好、不易老化、承受力强
- 使用方法：将电线尾部外皮剥去再插入套管内，用压线钳压紧即可
- 特点：外壳为尼龙注塑成型，内部铜管特长，增加电线压接范围，使其更易于导电，并能夹住电线，即使强烈振动也不脱落

Material: Nylon 66, 94V-2, certificated by UL. Acid and corrode resisting, insulate, not to age;

How to use: peel the coat of wire, then insert to tube, use pincers for compressing, fix them tightly;

Feature: Nylon shell, long copper tube, easy to conduct electricity and hold wire tightly.

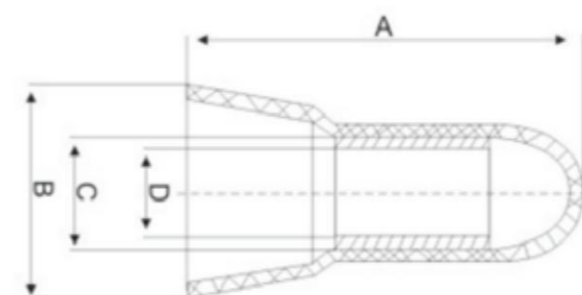

型号 Type	高 A(mm)	宽 (mm)		铜管内径 D(mm)	使用电缆范围 Suitable Wires		包装 Packing
		B	C		mm ²	awg	
HDS-F3	17.8	7.2	5.5	2.5	1.25	22-16	100PCS & 1000PCS
HDS-F4	21.0	8.2	5.8	2.9	2	16-14	
HDS-F5	22.5	9.0	6.7	3.9	5.5	12-10	
HDS-F6	25.0	10.0	7.8	4.5	8	8	100PCS & 500PCS
HDS-F7	24.2	11.0	9.4	5.4	10	8-6	
HDS-F8	25.6	11.8	10.2	6.0	13	6	

