


**SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER**

**PINNING**

PIN	DESCRIPTION
1	Cathode
2	Anode

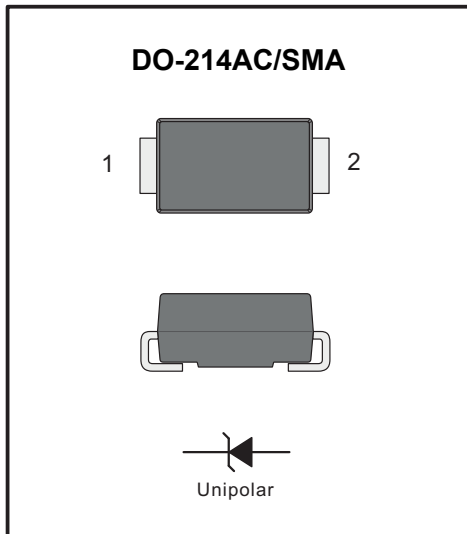

**Features**

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Low power loss, high efficiency
- ◆ Built-in strain relief, ideal for automated placement
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250 °C/10 seconds at terminals

**Mechanical Data**

- ◆ Case: JEDEC DO-214AC/SMA molded plastic body
- ◆ Terminals: Solderable per MIL-STD-750, Method 2026
- ◆ Polarity: Color band denotes cathode end Mounting
- ◆ Position: Any
- ◆ Weight : 0.0018 ounce, 0.064 grams

**Maximum Ratings And Electrical Characteristics**

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	SS32	SS33	SS34	SS35	SS36	SS38	SS310	SS3150	SS3200	UNITS
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	20	30	40	50	60	80	100	150	200	V
Maximum RMS voltage	V <sub>RMS</sub>	14	21	28	35	42	56	70	105	140	V
Maximum DC blocking voltage	V <sub>DC</sub>	20	30	40	50	60	80	100	150	200	V
Maximum average forward rectified current at TL(see fig.1)	I <sub>(AV)</sub>	3.0									A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	100									A
Maximum instantaneous forward voltage at 3.0A	V <sub>F</sub>	0.55			0.70			0.85		0.95	V
Maximum DC reverse current at rated DC blocking voltage T <sub>A</sub> =25°C T <sub>A</sub> =125°C	I <sub>R</sub>	0.5						0.2		mA	
		20						10			
Typical junction capacitance (NOTE 1)	C <sub>J</sub>	500			300						pF
Typical thermal resistance (NOTE 2)	R <sub>θJA</sub>	55.0									°C/W
Operating junction temperature range	T <sub>J</sub>	-55 to +125						-55 to +150			°C
Storage temperature range	T <sub>STG</sub>	-55 to +150									°C

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.  
2. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas

Fig.1 Forward Current Derating Curve

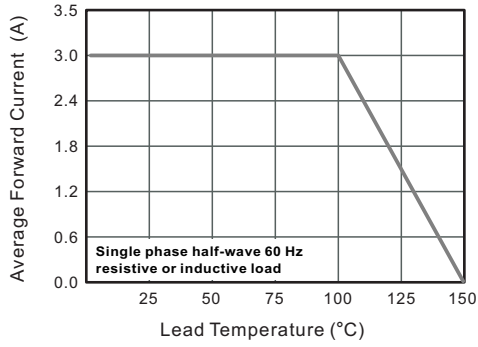


Fig.2 Typical Reverse Characteristics

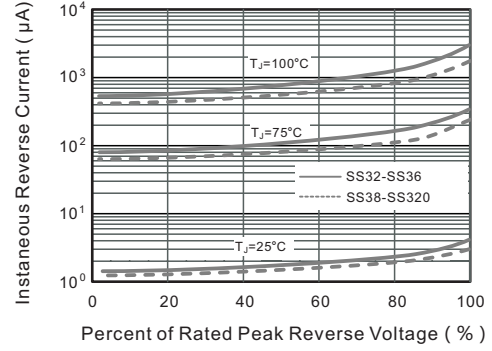


Fig.3 Typical Forward Characteristic

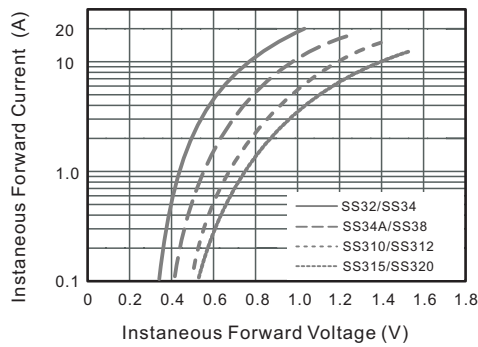


Fig.4 Typical Junction Capacitance

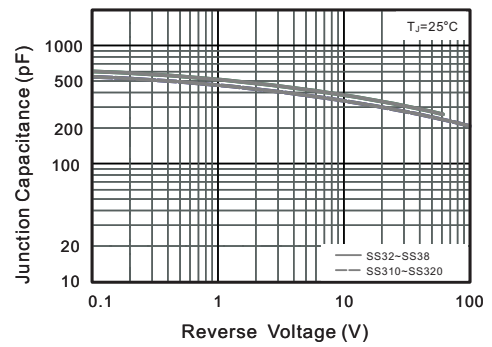


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


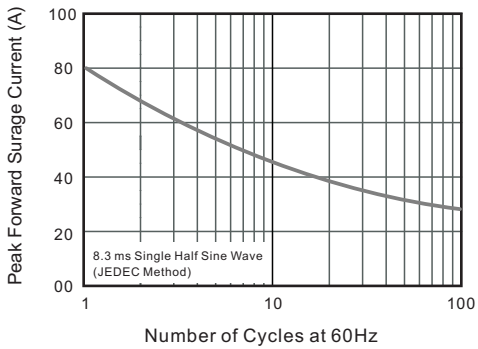



Fig.5- Typical Transient Thermal Impedance

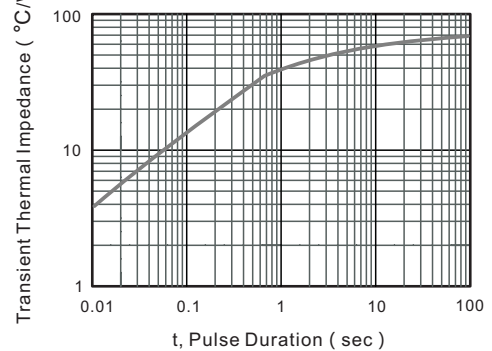

**PACKAGE OUTLINE**

Plastic surface mounted package; 2 leads

SMA

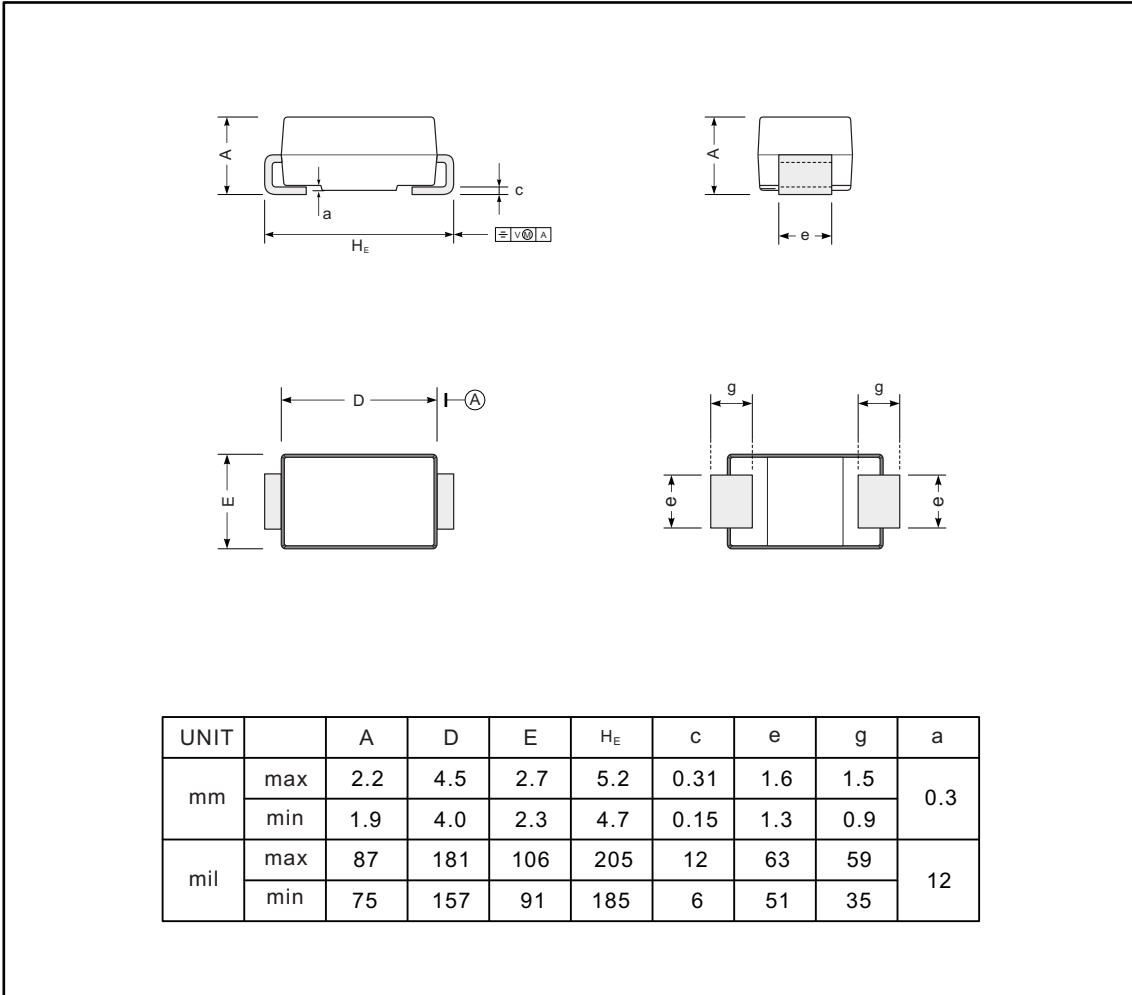

**The recommended mounting pad size**

